

08-23-00

A


08/22/00  
jc821 U.S. PTO


Please type a plus sign (+) inside this box → ☐

Approved for use through 09/30/2000. OMB 0651-0032  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

<b>UTILITY PATENT APPLICATION TRANSMITTAL</b> <small>(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))</small>	Attorney Docket No. <b>4397.32</b>
	First Inventor or Application Identifier <b>Farzad Hiri</b>
	Title <b>Methods of Controlling Communications with at least</b>
	Express Mail Label No. <b>EL440465768US</b>

jc886 U.S. PTO  
09/643621  
08/22/00

<b>APPLICATION ELEMENTS</b> <small>See MPEP chapter 600 concerning utility patent application contents.</small>		<b>ADDRESS TO:</b> Assistant Commissioner for Patents Box Patent Application Washington, DC 20231			
1. <input checked="" type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17) <small>(Submit an original and a duplicate for fee processing)</small>	5. <input type="checkbox"/> Microfiche Computer Program (Appendix)	<b>ACCOMPANYING APPLICATION PARTS</b> 7. <input type="checkbox"/> Assignment Papers (cover sheet & document(s)) 8. <input type="checkbox"/> 37 C.F.R. § 3.73(b) Statement <input checked="" type="checkbox"/> Power of Attorney <small>(when there is an assignee)</small> 9. <input type="checkbox"/> English Translation Document (if applicable) 10. <input checked="" type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input checked="" type="checkbox"/> Copies of IDS Citations 11. <input type="checkbox"/> Preliminary Amendment 12. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) <small>(Should be specifically itemized)</small> 13. <input type="checkbox"/> * Small Entity Statement(s) <input type="checkbox"/> Statement filed in prior application, Status still proper and desired <small>(PTO/SB/09-12)</small> 14. <input type="checkbox"/> Certified Copy of Priority Document(s) <small>(if foreign priority is claimed)</small> 15. <input type="checkbox"/> Other:			
2. <input checked="" type="checkbox"/> Specification <small>[Total Pages 25]</small> - Descriptive title of the invention - Cross References to Related Applications - Statement Regarding Fed sponsored R & D - Reference to Microfiche Appendix - Background of the invention - Brief Summary of the invention - Brief Description of the Drawings (if filed) - Detailed Description - Claim(s) - Abstract of the Disclosure	6. <input type="checkbox"/> Nucleotide and/or Amino Acid Sequence Submission <small>(if applicable, all necessary)</small> a. <input type="checkbox"/> Computer Readable Copy b. <input type="checkbox"/> Paper Copy (identical to computer copy) c. <input type="checkbox"/> Statement verifying identity of above copies				
3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) <small>[Total Sheets 3]</small>					
4. <input type="checkbox"/> Oath or Declaration <small>[Total Pages 5]</small> a. <input checked="" type="checkbox"/> Newly executed (original or copy) b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. § 1.63(d)) <small>(for continuation/divisional with Box 16 completed)</small> i. <input type="checkbox"/> <b>DELETION OF INVENTOR(S)</b> Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).					
<b>NOTE FOR ITEMS 1 &amp; 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).</b>					
16. If a <b>CONTINUING APPLICATION</b> , check appropriate box, and supply the requisite information below and in a preliminary amendment: <input type="checkbox"/> Continuation <input type="checkbox"/> Divisional <input type="checkbox"/> Continuation-in-part (CIP) of prior application No: _____ Prior application information: Examiner _____ Group / Art Unit: _____ <b>For CONTINUATION or DIVISIONAL APPS only:</b> The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.					
<b>17. CORRESPONDENCE ADDRESS</b> <input checked="" type="checkbox"/> Customer Number or Bar Code Label  <small>(Insert Customer No. or Attach bar code label here)</small> or <input type="checkbox"/> Correspondence address below					
Name	Roger S. Burleigh Burleigh & Associates <b>PATENT TRADEMARK OFFICE</b>				
Address	1509 Main Street Suite 1709				
City	Dallas			State	Texas
Country	U.S.A.			Zip Code	75201
Telephone	214-752-2213			Fax	214-752-2214

Name (Print/Type)	Roger S. Burleigh	Registration No. (Attorney/Agent)	40,542
Signature		Date	08/22/2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

+

**METHODS OF CONTROLLING COMMUNICATIONS WITH AT LEAST TWO  
CALLING PARTY DEVICES BY A USER OF A CALLED PARTY DEVICE**

**Inventors:**

Farzad Hiri  
8500 Bridgend Court  
Plano, Texas 75024

Mark Peck  
2301 Treyburn Court  
Plano, Texas 75075

Adam Roach  
9430 Briarhurst Drive  
Dallas, Texas 75243

**Assignee:**

Telefonaktiebolaget L.M. Ericsson

**Prepared by:**

Roger S. Burleigh  
Registration No. 40,542

**Correspondence Address:**

Burleigh & Associates  
1509 Main Street, Suite 1709  
Dallas, Texas 75201  
(214) 752-2213      Voice  
(214) 752-2214      Facsimile  
[ip-law@swbell.net](mailto:ip-law@swbell.net)

002280" Feb 4 1990

**METHODS OF CONTROLLING COMMUNICATIONS WITH AT LEAST TWO  
CALLING PARTY DEVICES BY A USER OF A CALLED PARTY DEVICE****5 TECHNICAL FIELD OF THE INVENTION**

The present invention is directed, in general, to communications systems and, more specifically, to methods of controlling communications with at least two calling party devices by a user of a called party device.

**10 BACKGROUND OF THE INVENTION**

004431650  
002220045 The world is currently experiencing revolutionary changes in communications systems, brought about, in part, by the evolution of the Internet. Conventional communications systems, however, such as the Public Switched Telephone Network (PSTN), are also undergoing revolutionary changes to bring enhanced services to subscribers.

Intelligent Network (IN) services refers generally to a collection of services offered to PSTN telephony system subscribers on a pre-subscribed basis, such as Calling Number Delivery, Calling Number Blocking, Customer Originated Trace, Automatic Recall, Automatic Callback, Selective Call Forwarding, Call Waiting, Selective Call Waiting, 20 Selective Call Rejection, and Selective Call Acceptance. The collection of IN services is continually growing as telecommunications system engineers devise both improved and novel systems and processes for providing advanced services. The medium for providing communications services, however, is gradually transitioning from the circuit-switched

PSTN networks to packet-switched networks, such as the Internet, and, thus, it is desirable to provide similar services in packet-switched communications environments.

One particularly popular IN service is Call Waiting. If a subscriber to the service is engaged in a call, and a call from another party is received, the subscriber receives an indication, such as an audible tone. The subscriber can, if desired, place the first call on hold and connect to the second call. After connecting to the second call, the subscriber can then alternate between the first and second calls, as desired. Although the Call Waiting IN services has become very popular, it has the disadvantage of only allowing a subscriber to communicate with one calling party at a time. For example, if, after connecting to the second call, the subscriber desires to tell the first caller that the subscriber needs to continue with the second call, the subscriber must place the second call on hold to reconnect to the first call, inform the first caller of this need, and then reconnect to the second call. This may be undesirable if, for example, the second call is long distance, extremely urgent, or the subscriber doesn't wish the second caller to know that the subscriber was on another call.

Accordingly, there is a need in the art for methods for providing an enhanced Call Waiting service that allows a subscriber to communicate with a first calling party without interrupting communications with a second calling party. There is a further need in the art for providing such enhanced Call Waiting service within a packet-switched communications network, such as the Internet.

**SUMMARY OF THE INVENTION**

To address the above-discussed deficiencies of the prior art, the present invention relates to methods, and communications devices employing such methods, of controlling communications with at least two calling party devices by a user of a called party device. In general, a first call link is established between a called party device and a first calling party device. The called party device then receives a call request from a second calling party device; e.g., a call-waiting indication. A user of the called party device places the first call link on hold, and accepts the call request from the second calling party device to establish a second call link between the called party device and the second calling party device. While the user of the called party device is in communication with the user of the second calling party device, the user can cause a message to be transmitted to the first calling party device, whereby the user of the called party device can communicate information to a user of the first calling party device without interrupting communications with a user of the second calling party device. A message to the first calling party device can, for example, instruct the user to hang up, continue to hold, or leave a message for the user of the called party device.

In certain embodiments, the message transmitted to the first calling party device is a prerecorded voice message. A user of the called party device can select a desired predefined message using an input mechanism associated with the called party device, e.g., a telephone keypad or computer keyboard. In alternative embodiments, a user of the called party device can generate a text message using an input mechanism, such as a computer keyboard, associated with the called party device. The text message can be

transmitted to the first calling party device for viewing on a display, if available, or the text message can be converted to speech.

As used herein, a "communications device" is broadly defined to include conventional telephony devices having only a user-input mechanism, such as a keypad, as well as general- or specific-based telephony or computing devices having a keypad (or keyboard) and display screen associated therewith. Furthermore, a communications device can be a wireline or wireless device. The principles of the present invention are adaptable to both circuit-switched and packet-switched communications networks. In a packet-switched communications network, such as the Internet, the principles of the present invention can be implemented, for example, using the Internet Engineering Task Force (IETF) Session Initiation Protocol (SIP); see, for example, IETF Request for Comments (RFC) 2543, © The Internet Society (1999), incorporated herein by reference.

The foregoing has outlined, rather broadly, the principles of the present invention so that those skilled in the art may better understand the detailed description of the exemplary embodiments that follow. Those skilled in the art should appreciate that they can readily use the disclosed conception and exemplary embodiments as a basis for designing or modifying other structures and methods for carrying out the same purposes of the present invention. Those skilled in the art should also realize that such equivalent constructions do not depart from the spirit and scope of the invention in its broadest form.

**BRIEF DESCRIPTION OF THE DRAWINGS**

For a more complete understanding of the present invention, reference is now made to the following detailed description taken in conjunction with the accompanying drawings, in which:

5           FIGURE 1-A illustrates an exemplary signaling diagram for establishing a call session between a calling party and called party communications devices using an Internet Engineering Task Force (IETF) Session Initiation Protocol (SIP);

FIGURE 1-B illustrates an exemplary SIP signaling diagram for receiving a request for, and the establishment of, a second call session with a second calling party communications device;

FIGURE 1-C illustrates an exemplary SIP signaling diagram for causing a "disconnect" message to be transmitted to a first calling party communications device while a called party communications device is in communication with a second calling party communications device;

15           FIGURE 1-D illustrates an exemplary SIP signaling diagram for causing a "hold" message to be transmitted to a first calling party communications device while a called party communications device is in communication with a second calling party communications device; and

20           FIGURE 1-E illustrates an exemplary SIP signaling diagram for causing a "leave voicemail" message to be transmitted to a first calling party communications device while a called party communications device is in communication with a second calling party communications device.

**DETAILED DESCRIPTION**

As previously noted, the principles of the present invention are adaptable to both packet-switched and circuit-switched communications networks, such as the Internet and the Public Switched Telephone Network (PSTN), respectively. The following description  
5 discloses a specific implementation based on the Internet Engineering Task Force (IETF) Session Initiation Protocol (SIP).

In general, a first call link is established between a called party device and a first calling party device; in packet-switched network environments, a call link is alternately referred to as a "call session" or "media session." The establishment of a first call session, using SIP signaling, is illustrated in FIGURE 1-A, described hereinafter. The called party device then receives a call request from a second calling party device; e.g., a "call-waiting" indication. A user of the called party device places the first call session on hold, and accepts the call request from the second calling party device to establish a second call session between the called party device and the second calling party device. The receipt of the request for, and establishment of, the second call session, using SIP signaling, is illustrated in FIGURE 1-B, described hereinafter. While the user of the called party device is in communication with the user of the second calling party device, the user can cause a message to be transmitted to the first calling party device, whereby the user of the called party device can communicate information to a user of the first calling party device without  
10  
15  
20 interrupting communications with a user of the second calling party device. A message to the first calling party device can, for example, instruct the user to hang up (or "disconnect"), continue to hold, or leave a voicemail for the user of the called party device. The transmission of a "disconnect," "hold," or "leave voicemail" message, using SIP



signaling, is illustrated in FIGURES 1-C, 1-D and 1-E, respectively, described hereinafter.

In FIGURES 1-A through 1-E, signals between communications devices are illustrated with numeric subscripts that indicate the relative order in which the signals are transmitted.

Referring to FIGURE 1-A, illustrated is an exemplary SIP signaling diagram for establishing a first call session between a calling party communications device 120 and called party communications devices 110. To initiate the establishment of the first call session, calling party communications device 120 sends an INVITE message ( $INVITE_1$ ) to called party communications device 110. It should be noted that, although communications device 120 is referred to as a "calling party" device and communications device 110 is referred to as a "called party device," it is not material whether one device or the other initiates the call session; for the reverse case, the direction of all signals shown in FIGURE 1-A are simply reversed. The INVITE message can include a "session description" that includes a port designator ( $Port\ X$ ) to identify a Real Time Protocol (RTP) port through which the call session (or "Media Session") between the communications devices is to be established; alternatively, the RTP port can be designated by the called party communications device 110 in a response message.

After receipt of the INVITE message ( $INVITE_1$ ), called party communications device 110 sends an OK message ( $OK_2$ ) to calling party communications device 120 to confirm the request for a call session. Calling party communications device 120 then acknowledges the confirmation message ( $OK_2$ ) received from called party communications device 110 by sending an acknowledgement message ( $ACK_3$ ), and the users of calling party and called party communications devices 120, 110 can begin communicating through the established media session ( $Media\ Session_1$ ).

Referring now to FIGURE 1-B, illustrated is an exemplary SIP signaling diagram for receiving a request for, and establishing, a second call session (*Media Session*<sub>2</sub>) with a second calling party communications device 130. To initiate the establishment of the second call session, calling party communications device 130 sends an INVITE message  
5 (*INVITE*<sub>1</sub>) to called party communications device 110. As previously described, an INVITE message can include a "session description" that includes a port designator (e.g., *Port Y*) to identify a RTP port through which the call session (or "Media Session") between the communications devices is to be established; alternatively, the RTP port can be designated by the called party communications device 110 in a response message.

After receipt of the INVITE message (*INVITE*<sub>1</sub>), called party communications device 110 can alert a user thereof of the incoming call request, for example, by generating an audible tone. If the user desires to accept the incoming call request from calling party communications device 130, the first call session (*Media Session*<sub>1</sub>) with calling party communications device 120 must be placed on hold. To place the first call session on hold,  
10 called party communications device 110 sends an INVITE message (*INVITE*<sub>2</sub>), also referred to as a "re-INVITE" message, to calling party communications device 120; the re-INVITE message (*INVITE*<sub>2</sub>) includes a session description that identifies a null ("Ø") RTP port; for example, if the communications medium uses an Internet Protocol (IP) addressing scheme, a "null" port could be defined as an address of 0.0.0.0. Calling party  
15 communications device 120 confirms receipt of the re-INVITE message (*INVITE*<sub>2</sub>) by sending an OK message (*OK*<sub>3</sub>) to called party communications device 110, which then sends an acknowledgement message (*ACK*<sub>4</sub>) back to calling party communications device 120. Because the session description for communications between called party

communications device 110 and calling party communications device 120 now identifies a null RTP port, the previously established media session (*Media Session<sub>1</sub>*), illustrated in FIGURE 1-A, is now effectively suspended (or, "on hold").

Once the previously established media session (*Media Session<sub>1</sub>*) between called party communications device 110 and calling party communications device 120 has been placed on hold, called party communications device 110 can return to the process of established a media session with calling party communications device 130. To do this, called party communications device 110 sends an OK message (*OK<sub>5</sub>*) to calling party communications device 130 to confirm the request for a call session. Calling party communications device 130 then acknowledges the confirmation message (*OK<sub>5</sub>*) received from called party communications device 110 by sending an acknowledgement message (*ACK<sub>6</sub>*), and the users of calling party and called party communications devices 130, 110 can begin communicating through the established media session (*Media Session<sub>2</sub>*).

It will be appreciated by those of ordinary skill in the art that the process of placing the first call session (*Media Session<sub>1</sub>*) on hold, and establishing the second call session (*Media Session<sub>2</sub>*), can be initiated by a user of called party communications device 110 simply by using an input mechanism, such as a keypad, associated therewith. For example, upon receipt of the INVITE message (*INVITE<sub>1</sub>*) from calling party communications device 130, a user of called party communications device 110 can trigger performance of the described SIP signals by depressing one or more keys on a keypad or keyboard; with conventional telephony devices, this is analogous to a "flash" or "flash-hook" used in the PSTN to alternate between calls.

At this point, the user of called party communications device 110 is communicating with the user of calling party communications device 130 through *Media Session*<sub>2</sub>, while the previously established media session (*Media Session*<sub>1</sub>) between called party communications device 110 and calling party communications device 120 has been placed  
5 "on hold;" i.e., the RTP port assigned to the media session has been set to a null port. As previously noted, conventional Call Waiting services provided by the PSTN allow a subscriber to alternate between first and second calls, as desired; e.g., by using a "flash" key on the subscriber's terminal. This capability, however, has the disadvantage of only allowing a subscriber to communicate with one calling party at a time. For example, if the  
10 user of called party communications device 110 desires to tell the user of calling party communications device 120 that the user needs to continue with the second call from the user of calling party communications device 130, the user must place the second call on hold to reconnect to the first call, inform the first calling party of this need, and then reconnect to the second call. This may be undesirable if, for example, the second call from  
15 calling party communications device 130 is a long distance call, extremely urgent, or the user doesn't wish the second caller to know that the user was on another call. The principles of the present invention overcome this limitation of the prior art by providing a mechanism for a user of called party communications device 110 to transmit a message to calling party communications device 120 without interrupting the call session (*Media*  
20 *Session*<sub>2</sub>) with calling party communications device 130. Three examples of such messages are described with reference to FIGURES 1-C, 1-D and 1-E.

Referring to FIGURE 1-C, illustrated is an exemplary SIP signaling diagram for causing a "disconnect" message to be transmitted to a first calling party communications

device 120 while a called party communications device 110 is in communication with a second calling party communications device 130. In this example, the user of called party communications device 110 desires to terminate the call session with the user of calling party communications device 120 after transmitting a message to the user of calling party communications device 120. To do this, called party communications device 110 sends an INVITE message ( $INVITE_1$ ), also referred to as a "re-INVITE" message, to calling party communications device 120; the re-INVITE message ( $INVITE_1$ ) can include a session description that identifies an RTP port through which the message will be directed (e.g., Port X). Calling party communications device 120 confirms receipt of the re-INVITE message ( $INVITE_1$ ) by sending an OK message ( $OK_2$ ) to called party communications device 110, which then sends an acknowledgement message ( $ACK_3$ ) back to calling party communications device 120. The called party communications device 110 then transmits a message,  $Message_4$  (disconnect), over a media session link identified in the session description (e.g., RTP Port X), followed by the transmission of a BYE message ( $BYE_5$ ) that terminates the media session temporarily established for transmission of the message.

The message,  $Message_4$  (disconnect), can be, for example, a prerecorded audio message, such as: "I'm sorry, but I need to take another call at this time; please hang up and I will call you back as soon as possible." A user of called party communications device 110 can initiate the process of causing the message to be transmitted, for example, simply by using an input mechanism, such as a keypad, associated therewith. For example, after establishing the call session ( $Media Session_2$ ) with calling party communications device 130, a user of called party communications device 110 can trigger performance of the described SIP signals, and transmission of the message,  $Message_4$  (disconnect), by

depressing one or more keys on a keypad or keyboard. Alternatively, in embodiments in which the called party communications device 110 includes a keyboard and display, such as a computer-based telephony device, the message can be a custom text message input using the keyboard, such as: "I'm sorry, Bob, but my boss is on the other line; I'll call you back." Such custom messages could be input and sent by the user of called party communications device 110 while simultaneously in voice communication via *Media Session*<sub>2</sub> with a user of calling party communications device 130. The transmission of a text message, however, assumes that the calling party communications device 120 has the capability to display the message; the capabilities of each communications device, however, can be provided in the session description information that is shared by the devices while establishing the media session. If the calling party communications device 120 does not have a text display capability, the custom text message input by the user of called party communications device 110 can be converted to speech using techniques known in the art, and the converted-speech message can then be transmitted to calling party communications device 120.

Referring to FIGURE 1-D, illustrated is an exemplary SIP signaling diagram for causing a "hold" message to be transmitted to a first calling party communications device 120 while a called party communications device 110 is in communication with a second calling party communications device 130. In this example, the user of called party communications device 110 desires the user of calling party communications device 120 to hold until the call with calling party communications device 130 can be finished. To do this, called party communications device 110 sends an INVITE message (*INVITE*<sub>1</sub>), also referred to as a "re-INVITE" message, to calling party communications device 120; the re-

INVITE message ( $INVITE_1$ ) can include a session description that identifies an RTP port through which the message will be directed (e.g., *Port X*). Calling party communications device 120 confirms receipt of the re-INVITE message ( $INVITE_1$ ) by sending an OK message ( $OK_2$ ) to called party communications device 110, which then sends an acknowledgement message ( $ACK_3$ ) back to calling party communications device 120. The called party communications device 110 then transmits a message,  $Message_4(hold)$ , over a media session link identified in the session description (e.g., *RTP Port X*).

After the message,  $Message_4(hold)$ , has been sent, called party communications device 110 places the call session with calling party communications device 120 back in a "hold" state. To place the call session on hold, called party communications device 110 sends an INVITE message ( $INVITE_5$ ), also referred to as a "re-INVITE" message, to calling party communications device 120; the re-INVITE message ( $INVITE_5$ ) includes a session description that identifies a null (" $\emptyset$ ") RTP port. Calling party communications device 120 confirms receipt of the re-INVITE message ( $INVITE_5$ ) by sending an OK message ( $OK_6$ ) to called party communications device 110, which then sends an acknowledgement message ( $ACK_7$ ) to calling party communications device 120. Because the session description for the call session between called party communications device 110 and calling party communications device 120 now identifies a null RTP port, the call session is now effectively suspended (or, "on hold").

The message,  $Message_4(hold)$ , can be, for example, a prerecorded audio message, such as: "I'm sorry; please hold and I will be with you as soon as possible." A user of called party communications device 110 can initiate the process of causing the message to be transmitted, for example, simply by using an input mechanism, such as a keypad,

associated therewith. For example, after establishing the call session (*Media Session<sub>2</sub>*) with calling party communications device 130, a user of called party communications device 110 can trigger performance of the described SIP signals, and transmission of the message, *Message<sub>4</sub>* (*hold*), by depressing one or more keys on a keypad or keyboard.

5 Alternatively, in embodiments in which the called party communications device 110 includes a keyboard and display, such as a computer-based telephony device, the message can be a custom text message input using the keyboard, such as: "I'm sorry, Bob, but my boss is on the other line; please hold." As previously noted, a custom message can be input and sent by the user of called party communications device 110 while  
10 simultaneously in voice communication via *Media Session<sub>2</sub>* with a user of calling party communications device 130; depending on the media capabilities of calling party communications device 120, the custom message can be transmitted in either a text format or converted to a speech format.

15 Referring to FIGURE 1-E, illustrated is an exemplary SIP signaling diagram for causing a "leave voicemail" message to be transmitted to a first calling party communications device 120 while a called party communications device 110 is in communication with a second calling party communications device 130. In this example, the user of called party communications device 110 desires to terminate the call session with the user of calling party communications device 120 after transmitting a message that  
20 requests the user of calling party communications device 120 to leave a voicemail message. To do this, called party communications device 110 sends an INVITE message (*INVITE<sub>1</sub>*), also referred to as a "re-INVITE" message, to calling party communications device 120; the re-INVITE message (*INVITE<sub>1</sub>*) can include a session description that



identifies an RTP port through which the message will be directed (e.g., *Port X*). Calling party communications device 120 confirms receipt of the re-INVITE message (*INVITE<sub>1</sub>*) by sending an OK message (*OK<sub>2</sub>*) to called party communications device 110, which then sends an acknowledgement message (*ACK<sub>3</sub>*) to calling party communications device 120.

- 5 The called party communications device 110 then transmits a message, *Message<sub>4</sub> (VM)*, over a media session link identified in the session description (e.g., *RTP Port X*).

The message, *Message<sub>4</sub> (VM)*, can be, for example, a prerecorded audio message, such as: "I'm sorry; but I need to take another call at this time; please hold and you will be transferred to my voicemail system where you can leave me a message." A user of called party communications device 110 can initiate the process of causing the message to be transmitted, for example, simply by using an input mechanism, such as a keypad, associated therewith. For example, after establishing the call session (*Media Session<sub>2</sub>*) with calling party communications device 130, a user of called party communications device 110 can trigger performance of the described SIP signals, and transmission of the message, *Message<sub>4</sub> (VM)*, by depressing one or more keys on a keypad or keyboard. Alternatively, in embodiments in which the called party communications device 110 includes a keyboard and display, such as a computer-based telephony device, the message can be a custom text message input using the keyboard, such as: "I'm sorry, Bob, but my boss is on the other line; please hold and you will be transferred to my voicemail system where you can leave me a message." As previously noted, a custom message can be input and sent by the user of called party communications device 110 while simultaneously in voice communication via *Media Session<sub>2</sub>* with a user of calling party communications device 130; depending on the media capabilities of calling party

communications device 120, the custom message can be transmitted in either a text format or converted to a speech format.

After the message, *Message<sub>4</sub> (VM)*, is sent to calling party communications device 120, called party communications device 110 sends a REFER message (*REFER<sub>5</sub>*). The REFER message (*REFER<sub>5</sub>*) sent by called party communications device 110 can include an address that identifies the messaging system 140 associated with the user of called party communications device 110; the address can be, for example, a Uniform Resource Locator (URL) address. Called party communications device 110 then terminates the media session with calling party communications 120 by sending a BYE message (*BYE<sub>6</sub>*) that terminates the media session temporarily established for transmission of the message.

Using the URL address provided by the REFER message (*REFER<sub>5</sub>*), calling party communications device 120 sends an INVITE message (*INVITE<sub>7</sub>*) to called party messaging system 140; the INVITE message (*INVITE<sub>7</sub>*) can include a session description that identifies an RTP port through which the message will be directed (e.g., *Port Z*). Called party messaging system 140 confirms receipt of the INVITE message (*INVITE<sub>7</sub>*) by sending an OK message (*OK<sub>8</sub>*) to calling party communications device 120, which then sends an acknowledgement message (*ACK<sub>9</sub>*) to called party messaging system 140. At this point, a media session has been established between calling party communications device 120 and called party messaging system 140. The user of calling party communications device 120 can then speak the message, *Message<sub>10</sub> (VM)*, to be recorded by called party messaging system 140. When the user of calling party communications device 120 has finished leaving the message, the media session established between calling party communications device 120 and called party messaging system 140 can be terminated, for

example, by the transmission of a BYE message ( $BYE_{11}$ ) from calling party communications device 120 to called party messaging system 140.

From the foregoing, those skilled in the art will recognize that the present invention provides significant advantages to communications systems, by providing an enhanced service that allows a subscriber to communicate with a first calling party without interrupting communications with a second calling party. Although the present invention has been described in detail, those skilled in the art will conceive of various changes, substitutions and alterations to the exemplary embodiments described herein without departing from the spirit and scope of the invention in its broadest form. The exemplary embodiments presented herein illustrate the principles of the invention and are not intended to be exhaustive or to limit the invention to the form disclosed; it is intended that the scope of the invention be defined by the claims appended hereto, and their equivalents.

## CLAIMS

## WHAT IS CLAIMED IS:

1        1. A method of controlling communications with at least two calling party  
2 devices by a user of a called party device, said method comprising the steps of:  
3        establishing a first call link between said called party device and a first calling party  
4 device;  
5        receiving a call request to said called party device from a second calling party  
6 device;  
7        placing said first call link on hold;  
8        accepting said call request from said second calling party device to establish a  
9 second call link between said called party device and said second calling party device;  
10       causing a message to be transmitted to said first calling party device while said  
11 called party device is in communication with said second calling party device, whereby  
12 said user of said called party device can communicate information to a user of said first  
13 calling party device without interrupting communications with a user of said second calling  
14 party device.

1       2. The method recited in Claim 1, wherein said message instructs said user of said  
2 first calling party device to hold.

1       3. The method recited in Claim 1, wherein said message instructs said user of said  
2 first calling party device that said call link to said called party device will be disconnected.

1 4. The method recited in Claim 3, further comprising the step of automatically causing  
2 said first call link to be terminated.

1 5. The method recited in Claim 1, wherein said message instructs said user of said  
2 first calling party device to leave a message.

1 6. The method recited in Claim 4, further comprising the step of automatically causing  
2 said first calling party device to be connected to a messaging system associated with said  
3 user of said called party device.

1 7. The method recited in Claim 1, wherein said message comprises a prerecorded  
2 voice message.

1 8. The method recited in Claim 7, wherein said step of causing a message to be  
2 transmitted to said first calling party device comprises the step of said user selecting one  
3 of a plurality of predefined messages using an input mechanism associated with said  
4 called party device.

1 9. The method recited in Claim 1, wherein said step of causing a message to be  
2 transmitted to said first calling party device comprises the step of said user generating a  
3 text message using an input mechanism associated with said called party device.

1 10. The method recited in Claim 9, further comprising the step of converting said text  
2 message to speech.

1 11. The method recited in Claim 1, wherein said call links between said called party  
2 device and said calling party devices are established through a packet-switched  
3 communications network.

1 12. The method recited in Claim 11 wherein said call links are established using an  
2 Internet Engineering Task Force (IETF) Session Initiation Protocol (SIP).

1           13. A communications device for receiving and controlling communications with  
2 at least two calling party devices by a user thereof, said communications device  
3 comprising:

4           means for establishing a first call link between said communications device and a  
5 first calling party device;

6           means for receiving a call request to said communications device from a second  
7 calling party device;

8           means for placing said first call link on hold;

9           means for accepting said call request from said second calling party device to  
10 establish a second call link between said communications device and said second calling  
11 party device;

12           means for causing a message to be transmitted to said first calling party device  
13 while said communications device is in communication with said second calling party  
14 device, whereby said user of said communications device can communicate information to  
15 a user of said first calling party device without interrupting communications with a user of  
16 said second calling party device.

1           14. The communications device recited in Claim 13 wherein said message instructs said  
2 user of said first calling party device to hold.

1           15. The communications device recited in Claim 13 wherein said message instructs said  
2 user of said first calling party device that said call link to said communications device will  
3 be disconnected.

1 16. The communications device recited in Claim 15 further comprising means for  
2 automatically causing said first call link to be terminated.

1 17. The communications device recited in Claim 13 wherein said message instructs said  
2 user of said first calling party device to leave a message.

1 18. The communications device recited in Claim 17 further comprising means for  
2 automatically causing said first calling party device to be connected to a messaging  
3 system associated with said user of said communications device.

1 19. The communications device recited in Claim 13, wherein said message comprises a  
2 prerecorded voice message.

1 20. The communications device recited in Claim 19, wherein said means for causing a  
2 message to be transmitted to said first calling party device comprises means for said user  
3 of said communications device to select one of a plurality of predefined messages using  
4 an input mechanism associated with said communications device.

1 21. The communications device recited in Claim 13, wherein said means for causing a  
2 message to be transmitted to said first calling party device comprises means for said user  
3 of said communications device to generate a text message using an input mechanism  
4 associated with said communications device.



1 22. The communications device recited in Claim 21, further comprising means for  
2 converting said text message to speech.

1 23. The communications device recited in Claim 13, wherein said call links between  
2 said communications device and said calling party devices are established through a  
3 packet-switched communications network.


1 24. The communications device recited in Claim 25, wherein said call links are  
2 established using an Internet Engineering Task Force (IETF) Session Initiation Protocol  
3 (SIP).

5


## 10

15


**FIG. 1-A**

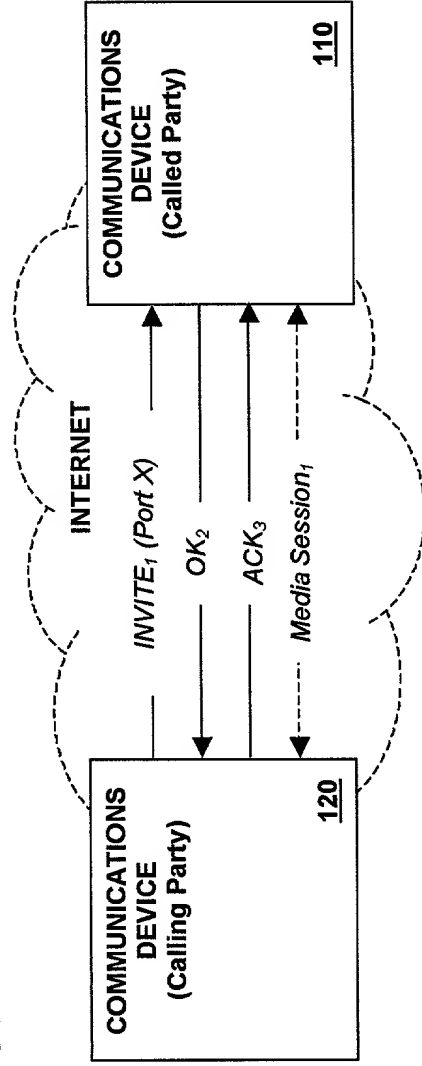


**FIG. 1-B**

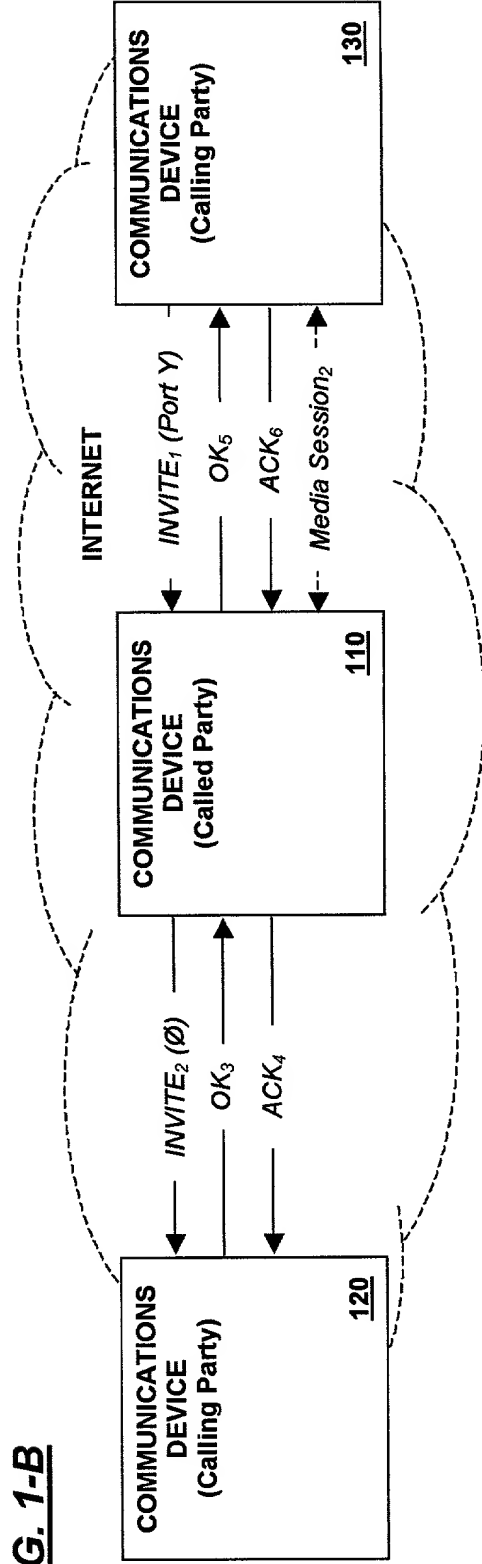


**FIG. 1-C**

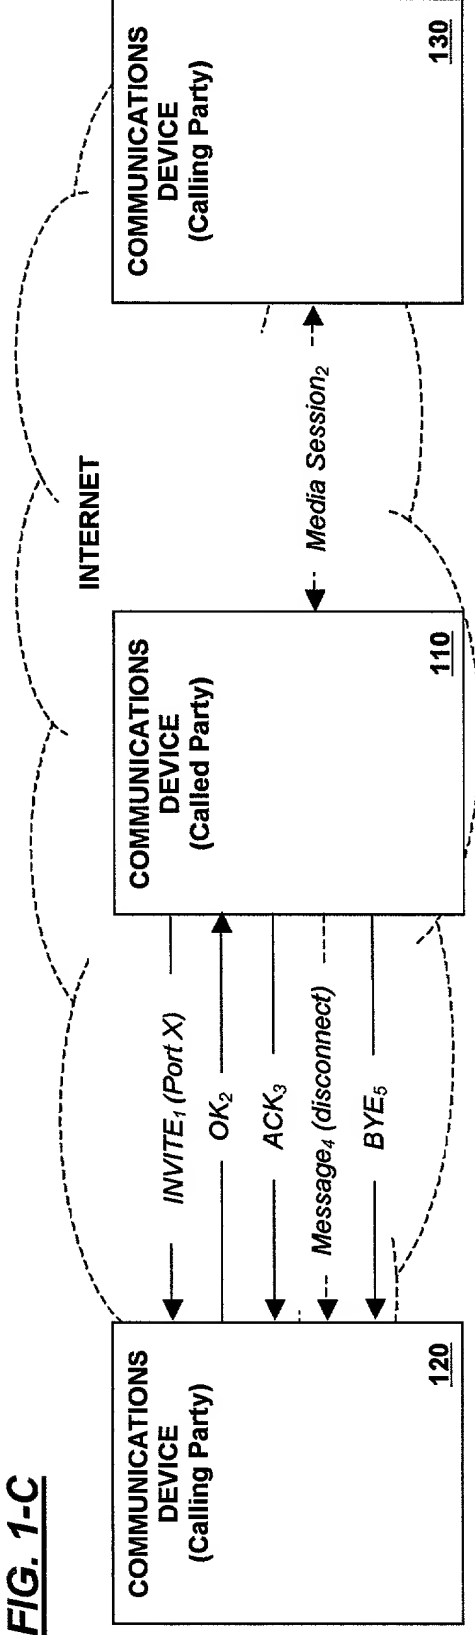

**FIG. 1-D**

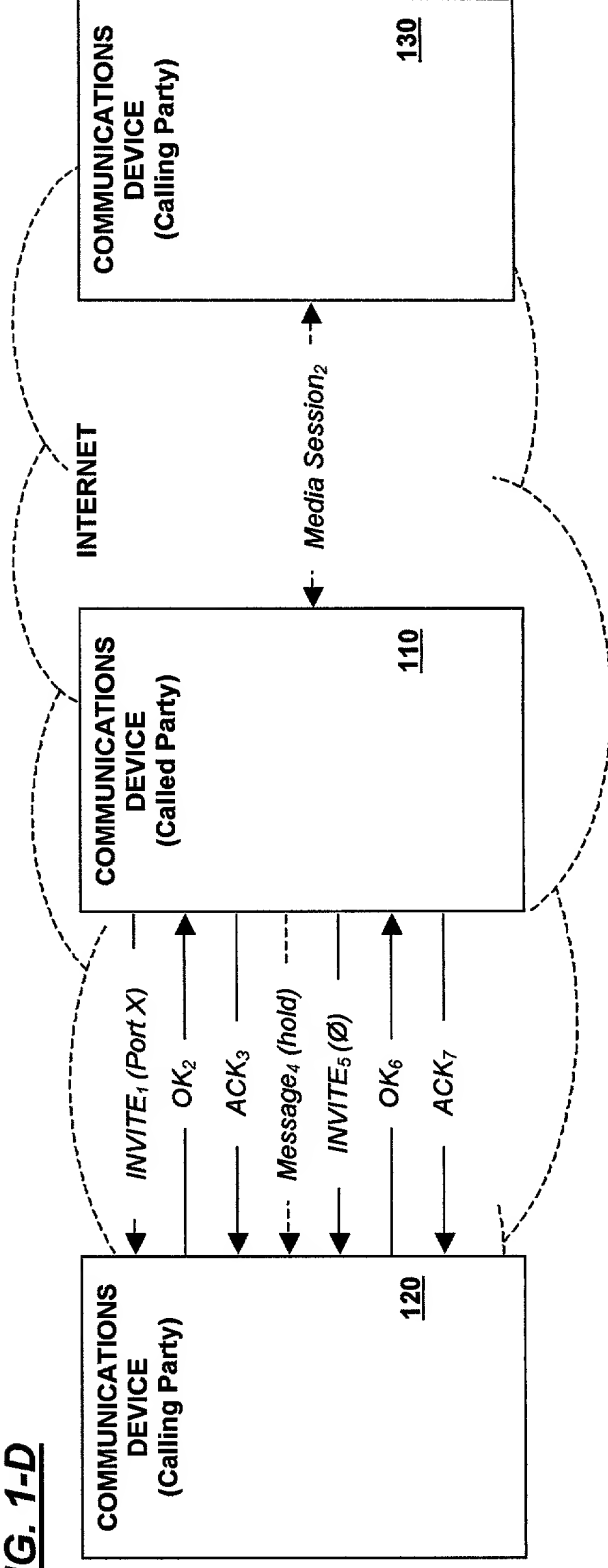

**FIG. 1-E**

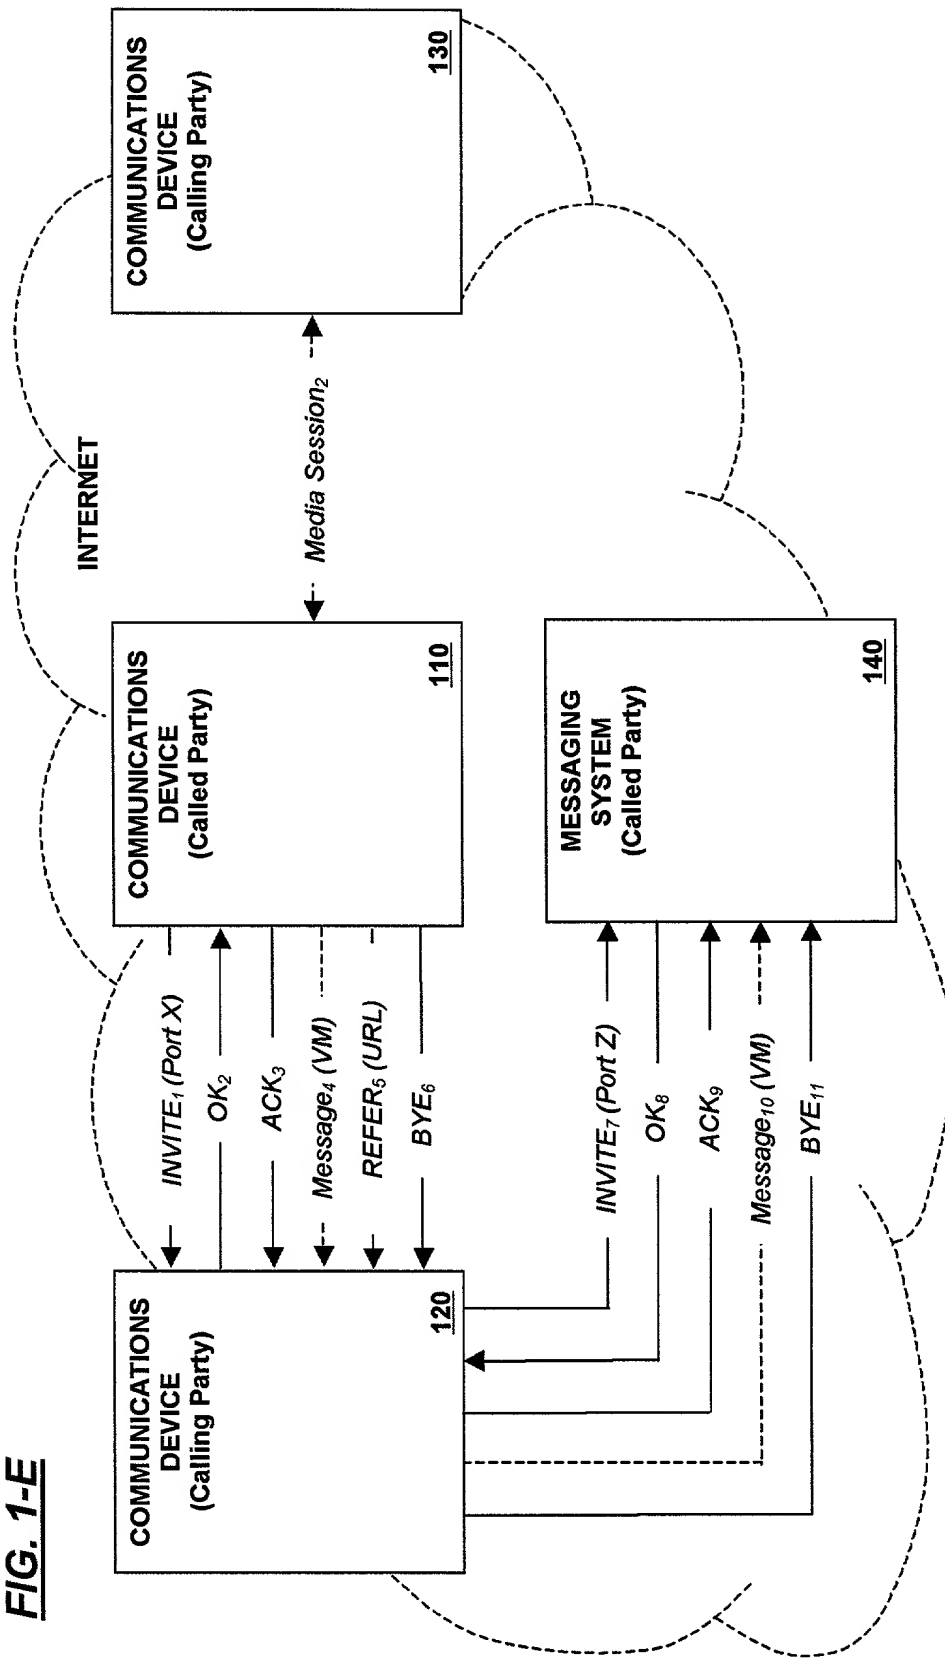

**COMBINED DECLARATION AND POWER OF ATTORNEY**

As a below named inventor, I hereby declare that:

**TYPE OF DECLARATION**

This declaration is for an original application.

**INVENTORSHIP IDENTIFICATION**

My residence, post office address and citizenship are as stated below, next to my name. I believe that I am the original, first and sole inventor (*if only one name is listed below*) or an original, first and joint inventor (*if plural names are listed below*) of the subject matter that is claimed, and for which a patent is sought on the invention entitled:

**TITLE OF INVENTION**

METHODS OF CONTROLLING COMMUNICATIONS WITH AT LEAST TWO CALLING PARTY DEVICES BY A USER OF A CALLED PARTY DEVICE

**SPECIFICATION IDENTIFICATION**

The specification is attached hereto.

**ACKNOWLEDGMENT OF REVIEW OF PAPERS AND DUTY OF CANDOR**

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information, which is material to patentability as defined in 37, Code of Federal Regulations, § 1.56, and which is material to the examination of this application, namely, information where there is a substantial likelihood that a reasonable Examiner would consider it important in deciding whether to allow the application to issue as a patent.

**POWER OF ATTORNEY**

I hereby appoint the following practitioner(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Roger S. Burleigh  
Registration No. 40,542

Charles L. Moore Jr.  
Registration Number 33,742

Mark C. Terrano  
Registration Number 40,200

David K. Purks  
Registration Number 40,133

Debra K. Stephens  
Registration Number 38,211

John C. Han  
Registration Number 41,403

---

**SEND CORRESPONDENCE TO :**

Roger S. Burleigh  
Burleigh & Associates  
1509 Main Street; Suite 1709  
Dallas, TX 75201

**DIRECT TELEPHONE CALLS TO:**

Roger S. Burleigh  
(214) 752-2213

---

**DECLARATION**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

**SIGNATURE**

Farzad Hiri

**Inventor's signature:** **Date:** 16/8/00**Country of Citizenship:** United States**Residence:** Plano, TX**Post Office Address:** 8500 Bridgend Court  
Plano, Texas 75024


002220-12964360



DECLARATION

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

SIGNATURE



Mark Peck

Inventor's signature:

Date: 8/14/00

Country of Citizenship: United States

Residence: Plano, TX

Post Office Address: 2301 Treyburn Court  
Plano, Texas 75075

002220" T29E7950

**DECLARATION**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

**SIGNATURE**

Adam Roach

**Inventor's signature:** \_\_\_\_\_

**Date:** \_\_\_\_\_ **Country of Citizenship:** United States

**Residence:** Dallas, TX

**Post Office Address:** 9340 Briarhurst Drive  
Dallas, Texas 75243

002230 1267450